6’(1.8m) MOUNTED NO-TILL

Seed close to field edges with the 3P606NT 3-Point Mounted No-Till Drill. This rugged 6’ seeder is ideal when space is limited or when maneuvering among trees and other obstacles. Loaded with features, this heavy-duty no-till drill includes 204kg preloaded coulters, an easily-accessible calibration crank, a ground-driven metering system, and rain-tight seed box lids.







6' MOUNTED NO-TILL MODEL

6' Mounted No-Till	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Weight
3P606NT	7.5"	67.5" (1.7m)	72.5" (1.8m)	N/A	60+	1,034kg

See www.greatplainsag.com for complete specifications.

3P606NT





3 BOX 3 SEED 3 RATE CAPABLE

ADDITIONAL STANDARD FEATURES

- Cat. 2 lower hitch plates
- V-bottom dividers
- Digital acremeter
- 2bu. (70 litres) per foot main seed box
- 1¾" fluted feed cups w/ powdered metal flutes
- Calibration crank
- Grease bank
- Direct link press wheel for depth control
- Heavy-duty coil springs
- Seed tubes and flaps
- Walkboard w/ steps
- Spring steel coulter mounting bars
- Watertight manual holder
- LED safety lighting

*only available by ordering through Parts

OPTIONS
(see website for complete list of features & options)

FEATURES & BENEFITS

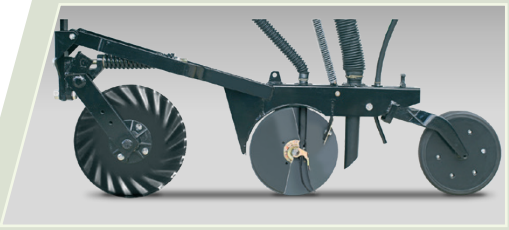

06 SERIES OPENER

The 06 Series row unit utilizes the "Fluff and Plant" no-till system with an integrally-mounted coulter to cut residue and prepare a mini seedbed for the trailing double-disc opener. The opener discs are 13.5" in diameter and 4mm thick with 205 triple-lip sealed bearings, and ¼" opener disc lead. Our unique full-length seed tube design and trailing flap control the seed all the way to the bottom of the seed trench where the seed stays in place.



LEAD COULTER OPTIONS

Choose between a 5/16" fluted coulter blade (left) that penetrates easily for minimum tillage or a 5/8" Turbo coulter blade (right) that is more aggressive and prepares a mini seedbed ahead of the opener. Preloaded springs offer 450 lbs (204kg) of down pressure per row on the leading coulter.



PRESS WHEEL OPTIONS

Choices include, from left, 3"x13" double rib*; 3"x13" center rib; 2"x13" smooth; 1"x12" double-V; or double wedge-style press wheels that create a pinching action to close the seed trench.



4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.



CENTER-MOUNTED DRIVE WHEEL

Eight settings allow the height of the ground drive wheel to be repositioned as needed.



T-HANDLE DEPTH CONTROL

18-position T-handle adjusts the rear gauge wheel for accurate depth control.



SMALL SEEDS BOX ATTACHMENT

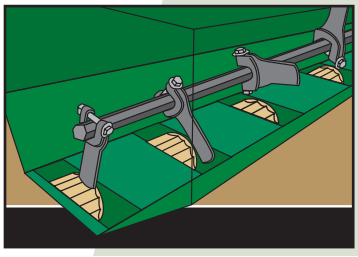

SEED BOX AGITATOR



NATIVE GRASS BOX



WEIGHT BRACKET

8'(2.4m) & 10'(3m) NO-TILL

The Great Plains 3P806NT and 3P1006NT are 2-point mounted no-till drills with lift-assist wheels to reduce tractor 3-point lift requirements. These drills are designed for planting directly into high-residue areas like those in food plots, pasture renovation, land reclamation, etc. Rugged openers and multiple box combinations allow three different seeds to be planted at three different rates, all at one time, and into some of the gnarliest plots around.







8' & 10' MOUNTED NO-TILL MODELS

8' & 10' Mounted No-till	Row Spacing	Working Width	Transport Width	Transport Height	Engine H.P. Required	Weight
3P806NT	7.5"	8'3" (2.5m)	8'3" (2.5m)	N/A	80+	1,839-2,898kg
3P1006NT	7.5"	9'5" (2.9m)	9'11" (3m)	N/A	100+	2,186-2,898kg

See www.greatplainsag.com for complete specifications.

3P806NT



3P1006NT



3 BOX 3 SEED 3 RATE CAPABLE



ADDITIONAL STANDARD FEATURES

- Digital acremeter
- 16.8 bu. (592 litres) main box capacity (3P1006NT)
- 14.3 bu. (504 litres) main box capacity (3P806NT)
- Cat. 2 hitch
- Calibration crank
- Coulter grease bank
- Folding rear ladder
- Manual storage pack
- Seed level indicator
- Gas shock-assisted lids
- LED safety lighting

*only available by ordering through Parts

OPTIONS
(see website for complete list of features & options)

FEATURES & BENEFITS



REAR LIFT-ASSIST

Two standard lift-assist wheels in the rear of the drill provide greater lift capacity and assist the tractor's 3-point.

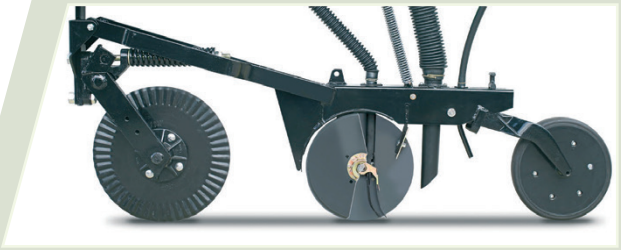

06 SERIES OPENERS

06 Series openers feature an integrally-mounted coulter and row unit combination with the opener moving independently of the coulter.

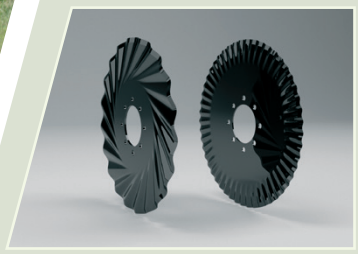

LEAD COULTER OPTIONS

Choose between a 5/8" Turbo coulter blade that is aggressive and prepares a mini seedbed ahead of the opener, or a 5/16" fluted coulter blade.



PRESS WHEEL OPTIONS

Single press wheel choices include a 3"x13" double* or center rib or a 2"x13" smooth. Double press wheels include 1"x12" double-V or wedge.



4-SPEED GEARBOX

Changing seed rates is quick and effortless with these permanently lubricated, sealed gearboxes.



DRIVE WHEEL

The drive wheel(s) serve a dual purpose: to drive the metering systems and assist in controlling coulter depth.



T-HANDLE DEPTH CONTROL

Provides 18 different positions for accurate depth control in ¼" increments.



SMALL SEEDS BOX ATTACHMENT

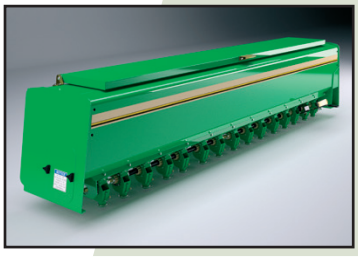

SECOND SEED BOX



FERTILIZER BOX



NATIVE GRASS BOX